


PEX-D24/PEX-D56

PCI Express, 24/56-channel Digital I/O Board

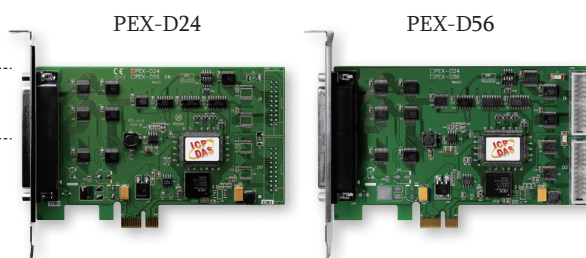

Features

- PCI Express x1 Interface
- Supports Card ID (SMD Switch)
- Emulates two Industrial-standard 8255 PPI Ports (Mode 0)
- DI/O Response Time approximately 2 μ s (500 kHz Max.)
- 24/56 Buffered TTL Digital Input/Output Lines
- Three 8-bit Bi-directional I/O Ports
- DO Provides Higher Driving Capability
- Four Interrupt Sources

Introduction

The PEX-D24/D56 series utilizes the PCI Express bus and is designed as an easy replacement for the PIO-D24/PIO-D24U/PIO-D56/PIO-D56U series without requiring any modification to either the software or the driver.

The PEX-D24/D56 provides 24/56 buffered TTL Digital Input/Output lines, which are grouped into three 8-bit bi-directional ports: Port A (PA), Port B (PB) and Port C (PC), and are configured as input mode during power-on or after a reset.

The PEX-D24/D56 also includes an onboard Card ID that enables the board to be easily recognized via software if two or more cards are installed in the same computer.

Software

Drivers

- ☒ 32/64-bit Windows XP/2003/2008/7/8/10
- ☒ Linux

Sample Programs

- ☒ DOS Lib and TC/BC/MSC Demo
- ☒ LabVIEW Toolkit
- ☒ VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

Hardware Specifications

Model	PEX-D24	PEX-D56	
Programmable DI/O			
Channels	24		
Digital Input			
Channels	-	16	
Compatibility	5 V/TTL		
Input Voltage	Logic 0: 0.8 V Max. Logic 1: 2.0 V Min.		
Response Speed	500 kHz		
Digital Output			
Channels	-	16	
Compatibility	5 V/TTL		
Output Voltage	Logic 0: 0.4 V Max. Logic 1: 2.4 V Min.		
Output Capability	Sink: 64 mA @ 0.8 V Source: 32 mA @ 2.0 V	CN1	Sink: 2.4 mA @ 0.8 V Source: 0.8 mA @ 2.0 V
		CN3	Sink: 64 mA @ 0.8 V Source: 32 mA @ 2.0 V
Response Speed	500 kHz		
General			
Bus Type	PCI Express x1		
Card ID	Yes (4-bit)		
Connectors	Female DB37 x 1	Female DB37 x 1, 20-pin Male Box Header x 2	
Power Consumption	650 mA @ +3.3 V 0 mA @ +12 V	750 mA @ +3.3 V 0 mA @ +12 V	
Operating Temperature	0°C to +60°C		
Humidity	5 to 85% RH, Non-condensing		

Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment
N.C.	01	20 +5V
N.C.	02	21 GND
PB_7	03	22 PC_7
PB_6	04	23 PC_6
PB_5	05	24 PC_5
PB_4	06	25 PC_4
PB_3	07	26 PC_3
PB_2	08	27 PC_2
PB_1	09	28 PC_1
PB_0	10	29 PC_0
GND	11	30 PA_7
N.C.	12	31 PA_6
GND	13	32 PA_5
N.C.	14	33 PA_4
GND	15	34 PA_3
N.C.	16	35 PA_2
GND	17	36 PA_1
+5V	18	37 PA_0
GND	19	

Pin Assignment	Terminal No.	Pin Assignment
DI 0	01	02 DI 1
DI 2	03	04 DI 3
DI 4	05	06 DI 5
DI 6	07	08 DI 7
DI 8	09	10 DI 9
DI 10	11	12 DI 11
DI 12	13	14 DI 13
DI 14	15	16 DI 15
GND	17	18 GND
+5 V	19	20 +12 V

CON2 (PEX-D56 only)

Pin Assignment	Terminal No.	Pin Assignment
DO 0	01	02 DO 1
DO 2	03	04 DO 3
DO 4	05	06 DO 5
DO 6	07	08 DO 7
DO 8	09	10 DO 9
DO 10	10	12 DO 11
DO 12	12	14 DO 13
DO 14	14	16 DO 15
GND	16	18 GND
+5 V	18	20 +12 V

CON1 (PEX-D56 only)

Ordering Information

PEX-D24 CR	PCI Express, 24-channel Digital I/O Board (RoHS)
PEX-D56 CR	PCI Express, 56-channel Digital I/O Board (RoHS)