

Output and control options

Model	Power	Option 1	Option 2	Option 3	Others
M60	CR				

	Function	Installable options	Isolated
R1	1 relay output	3	yes
T1	1 transistor output	3	yes
SSR	1 control for SSR relay	3	yes
AO	1 analog output	3	yes
RTU	1 Modbus RTU port	3	yes
S4	1 RS-485 port	3	yes
S2	1 RS-232 port	3	yes
R2, R4, R6	special modules up to 6 relay outputs. Check for information.		

Other options

Option NBT



Without front keypad

Option G



Green leds

Accessories

WME



Wall mount

DRA



DIN rail mount

THM



Benchtop housing

KIP



Protector IP65


KA96



Adapter 96 x 96 mm

Application example

Electrolysis application times, controlled by a M60-CR instrument. The operator assigns the time to apply the chemical treatment and the instrument will activate the 'Stop relay' when the configured time is reached. Additionally, a second time counter can be defined to count the 'exceeded' time since the alarm was activated, or the total accumulated time with treatment activated, for maintenance control of the deposit.

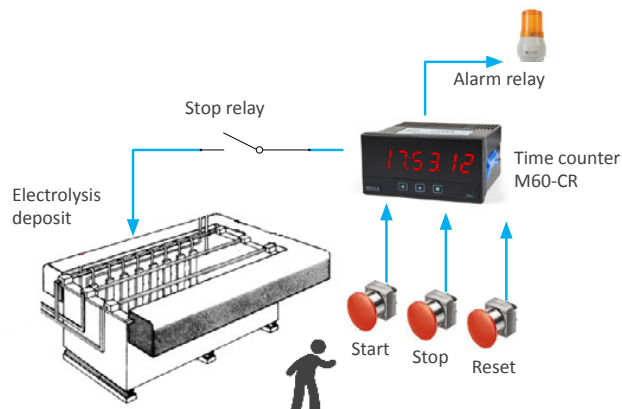

Reading distances

Digit height (mm)	10	14	20	60	100
Reading distance	4 m	5 m	8 m	20 m	40 m
Series	L	M,S	K	B2x	B4x

Other Chronometers

Series M

4, 5 and 6 digits

digit height 14 mm
color red, green
vision 5 meters
size 96 x 48 mm

DIGITAL PANEL METER
SERIES M
Full Signal Ranges Available



Series K

Further view

digit height 20 mm
color red
vision 8 meters
size 96 x 48 mm

DIGITAL PANEL METERS
SERIES K
20 mm Digit Size



Series S

Compact size

digit height 14 mm
color red, green
vision 5 meters
size 72 x 36 mm

DIGITAL PANEL METERS
SERIES S
Compact Size 72x36 mm



50
YEARS

1969-2019

Q
ISO 9001

Certified Quality

CE
EN-61010-1

Security

CE
EN-61326-1

Electromagnetic C.

5
YEARS

Extended Warranty